

Pit Systems & Accessories Water Treatment

0

3

Systems

Making a positive impact on our environment for today and future generations.



US HydroTech Environmental Solutions | 5500 Commerce Blvd. Suite A, Rohnert Park, CA 94928 (707) 793-4800 | www.WaterForReuse.com | info@usHydroTech.com

Pit Systems In-Ground Fiberglass Pits

The different pit components are designed to:

Effectively pre-treat wash water for treatment by an above-ground system | Be easily installed





Use these premium quality fiberglass pit components to create the appropriate pre-treatment pit system for wash water recycle or sewer discharge operations. These fiberglass components are customizable and the pit cleaner and pit enhancement system accessories make your system more versatile.

> SHIP WT. 480 lb. 480 lb. 480 lb. 480 lb. 250 lb. 45 lb. 100 lb. 200 lb. 546 lb. 680 lb.

3' x 9' Pit Systems

| PART NUMBER | PIT SIZE (FT.) | DESCRIPTION |
|------------------|----------------|---|
| 12-0074 | 3x9x4.5 | 3-stage collection pit, fiberglass, 600-gallon capacity |
| 12-0223 | 3x9x4.5 | 3-ft. x 9-ft. baffleless pit, fiberglass, 600-gallon capacity |
| 12-0238 | 3x9x4.5 | 2-stage collection pit with single baffle, fiberglass, 600-gallon capacity |
| 12-0244 | 3x9x4.5 | 3-stage collection pit with middle weir and third baffle, fiberglass, large solids settling area, 600-gallon capacity |
| 20-0635A01 | Fits 3x9 | Above-ground external brace kit, #12-0074 |
| 20-1505A01 | Fits 3x9 | Pit liner assembly, painted; 2 qty. are required |
| 56-0032 | Fits 3x9 | Aluminum hinged diamond plate cover with 3 frame sections |
| RC-0001-0003 | Fits 3x9 | Brace kit for installation of 3-stage collection pit |
| RC-0018-0001* | Fits 3x9 | Steel grating for pit; 3,060 lb./ft. ² uniform load rating |
| RC-0018-0002* | Fits 3x9 | Steel grating for pit with steel cover; 3,060 lb./ft. ² uniform load rating |
| *May combine RC- | 0018-0001 and | I RC-0018-0002 to have both open and closed sections for the 3'x9' pits. |

See photo on page 8. Consult dealer for more information.

3' x 3' Pit System

| PART NUMBER | PIT SIZE (FT.) | DESCRIPTION | SHIP WT. | | | |
|--------------|----------------|--|----------|--|--|--|
| 12-0071 | 3x3x4.5 | Catch basin, fiberglass, 100-gallon capacity | 190 lb. | | | |
| 20-0480A01 | Fits 3x3 | Steel grating for pit, 2 sections; 6,250 lb./ft. ² uniform load rating, H-20 load rated | 250 lb. | | | |
| 20-0733A01 | Fits 3x3 | Above-ground external brace kit | 250 lb. | | | |
| 20-1553A01 | Fits 3x3 | Pit liner assembly, painted | 26 lb. | | | |
| 56-0031 | Fits 3x3 | Aluminum diamond plate cover and frame | 30 lb. | | | |
| RC-0001-0002 | Fits 3x3 | Brace kit for installation of 3-ft. x 3-ft. pit | 150 lb. | | | |
| 2' x 2' Pit | System | | | | | |

| | , | | |
|--------------|----------------|--|----------|
| PART NUMBER | PIT SIZE (FT.) | DESCRIPTION | SHIP WT. |
| 12-0073 | 2x2x3 | Sump pit, fiberglass, 50-gallon capacity | 92 lb. |
| 20-0479A01 | Fits 2x2 | Steel grating for pit; 6,660 lb./ft. ² uniform load rating, H-20 load rated | 100 lb. |
| 56-0030 | Fits 2x2 | Aluminum diamond plate cover and frame | 60 lb. |
| RC-0001-0001 | Fits 2x2 | Brace kit for installation of 2-ft. x 2-ft. pit | 75 lb. |




Steel grating for pit, RC-0018-0001




US HydroTech Environmental Solutions | 5500 Commerce Blvd. Suite A, Rohnert Park, CA 94928 (707) 793-4800 | www.WaterForReuse.com | info@usHydroTech.com

Pit Systems In-Ground Fiberglass Pit Systems

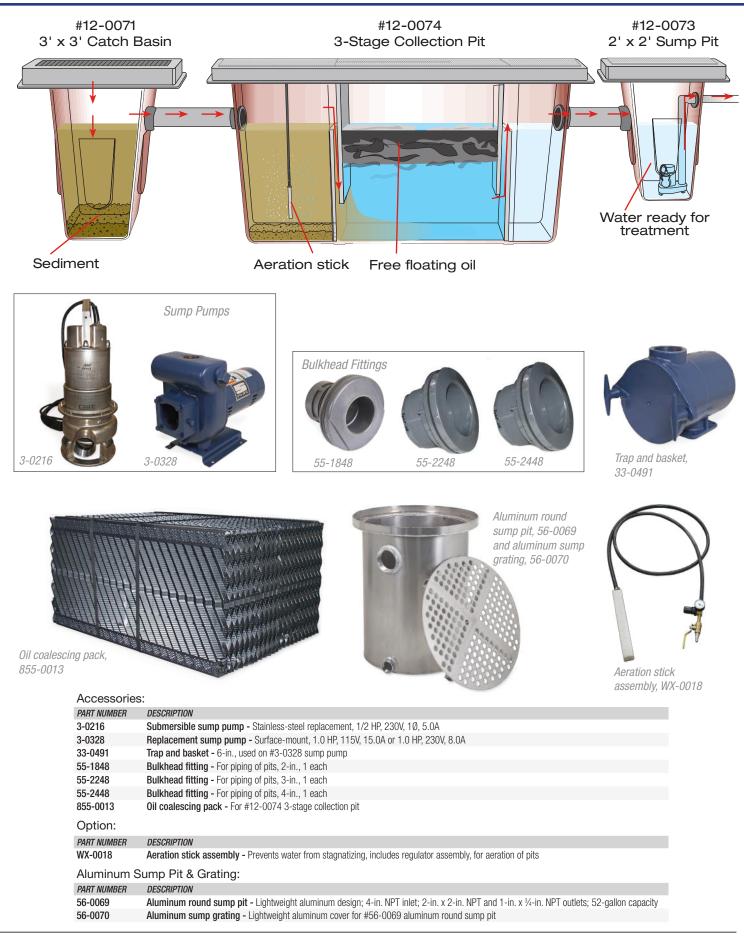

US HydroTech Environmental Solutions | 5500 Commerce Blvd. Suite A, Rohnert Park, CA 94928 (707) 793-4800 | www.WaterForReuse.com | info@usHydroTech.com

Pit Cleaner

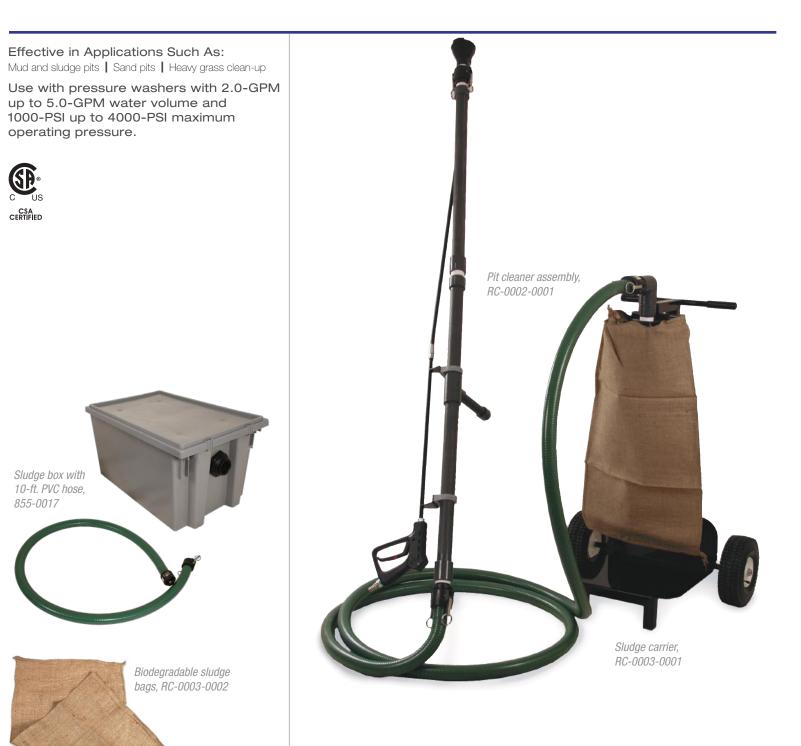


The Pit Cleaner is the right tool to aid in the clean-up of solids in hard-to-reach places. It is designed to draw and filter the solids that collect in wash water pits.

| PART NUMBER | DESCRIPTION | DIMENSIONS (LxWxH) | SHIP WT. |
|--------------|---|--------------------|----------|
| 855-0017 | Sludge box - Plastic box designed to hold the sludge bags; includes a 10-ft. x 2-in. diameter PVC hose | 30x20x16in. | 31 lb. |
| RC-0002-0001 | Pit cleaner assembly - Includes suction lance, suction head and flex hose; 87-in. suction lance is capable of vacuuming solids up to 1-in. diameter, 20-ft. of flexible hose is standard with the suction lance | 93x12x4in. | 25 lb. |
| RC-0003-0001 | Sludge carrier - Movable cart designed to hold the sludge bags | 22x29x48in. | 53 lb. |
| RC-0003-0002 | Biodegradable sludge bags - Designed to capture the sludge while allowing the water to flow through, used with either #855-0017 sludge box or #RC-0003-0001 sludge carrier; 5 qty. | - | - |

Sample Pit Cleaning Application

Includes In-Ground Fiberglass Pit System

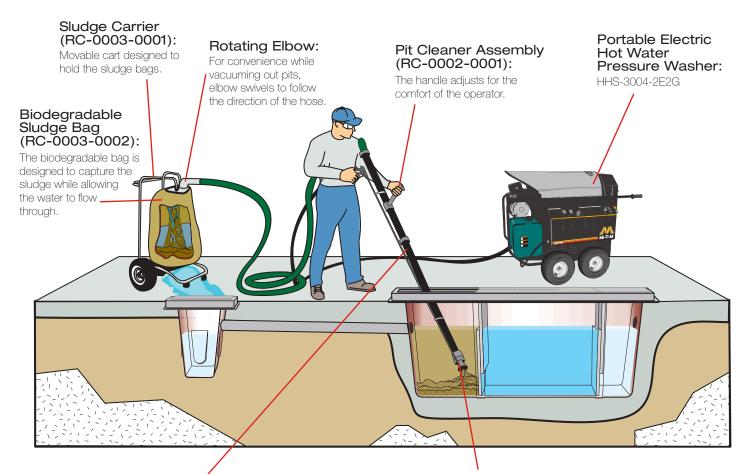

Suction Lance (RC-0002-0001):

This 87-inch suction lance is capable of vacuuming up to 1-inch diameter solids. 20-feet of flexible hose is standard with the suction lance.

Suction Head:

Venturi-effect in the suction head causes force from the pressure washer to suck mud from the bottom of the pit into the biodegradable sludge bag.

The Importance of a Proper Pit System

Once equipment is washed, the untreated wash water

flows into your pit system. A proper pit system for your

application is the first step in proper wash water treatment

and a critical element in any wash water recycle system.

Typical Pre-treatment Applications Include:

- Rental Yards
- Golf Courses
- Heavy Equipment Dealers Shipyards
- Trucking Facilities
- Military Bases
- Truck Rental Fleets -
- Diesel Repair Facilities
- Forklift Washing Operations
- Aircraft Maintenance and Restoration
- Shipyards
- Municipalities/State DOTs
- Oil Fields
- Engine Rebuilders and Manufacturers
 - cturers Consult your dealer to determine the pit system configuration that works best for your application.

BPS Series Biological Pit Enhancement System

The Biological Enhancement System consists of:

- 2 aeration pumps linear pumps used to infuse air into water collection pits
- 2 peristaltic pumps used to inject bacteria and nutrients if so desired

Features:

115V single phase setting | Internal timers allow end user to control the amount and frequency of the liquid microbes and nutrient doses. The BPS Series can be set to inject bacteria every minute, every hour or every day, whatever the situation dictates.





Shown with side panel removed and liquid microbes, AW-0058-0020, not included


 MODEL NUMBER
 POWER REQUIREMENTS
 DIMENSIONS (LxWxH)
 SHIP WT.


 BPS-120M
 120V, 1Ø, 8.0A, 60Hz
 30x22x39in.
 150 lb.



The Biological Pit Enhancement System enables you to inject microbes and nutrients into water stored in pits where oil collects. The BPS Series will improve the quality of the water by decreasing the amount of oils while adding oxygen.

Sample Pit Application Includes Biological Pit Enhancement System

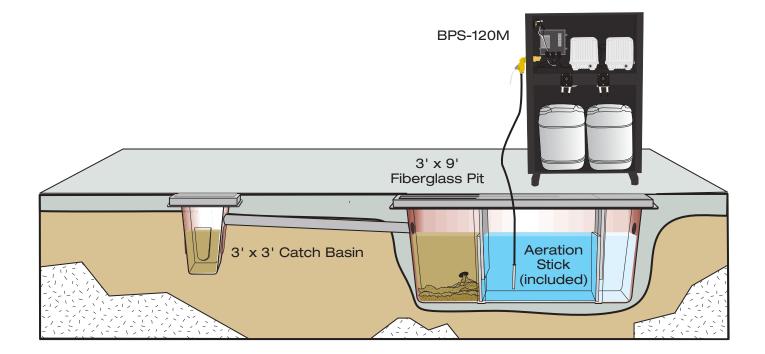

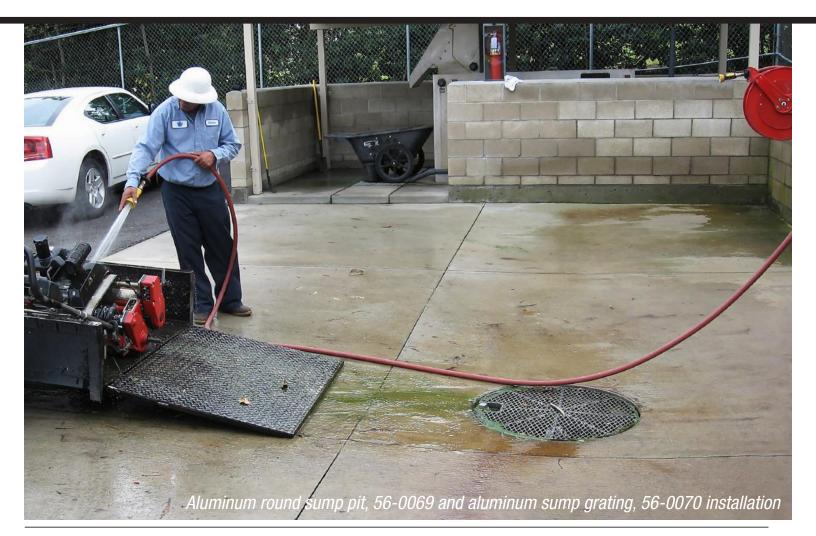

Steel Grating Options for Pit Systems

Steel grating for pit, RC-0018-0001; and steel grating for pit with steel cover, RC-0018-0002; may be combined to have both open and closed sections for 3' x 9' fiberglass pits.



Steel Grating Options for Pits PART NUMBER PIT SIZE (FT.) DESCRIPTION UNIFORM LOAD RATING SHIP WT. RC-0018-0001* Fits 3x9 Steel grating for pit 3,060 lb./ft.2 546 lb. 3,060 lb./ft.2 RC-0018-0002* Fits 3x9 Steel grating for pit with steel cover 680 lb. Fits 3x3 20-0480A01 Steel grating for pit, 2 sections 250 lb. 6,250 lb./ft.2, H-20 load rated 20-0479A01 Fits 2x2 Steel grating for pit 6,660 lb./ft.2, H-20 100 lb. load rated *May combine RC-0018-0001 and RC-0018-0002 to have both open and closed

*May combine RC-0018-0001 and RC-0018-0002 to have both open and closed sections for the 3'x9' pits



5500 Commerce Blvd. Suite A Rohnert Park, CA 94928 (707) 793-4800 www.WaterForReuse.com info@usHydroTech.com

